

WAT-2400S

1/2.8 小型 高靈敏度網路彩色攝像機


As small as WAT-902 series



■ 特徵

- 支持 microSD 可實現單機錄製，無需網路連接。
- 6 秒視頻快速啟動。
- 省電 PoE : 2.4W/50mA DC+12V : 1.8W/150mA

■ 外型尺寸圖

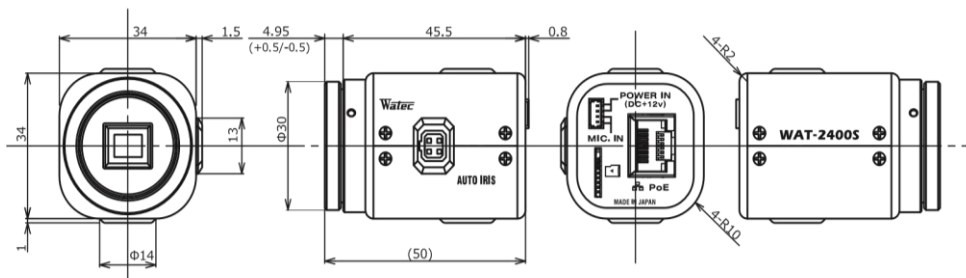

規格

攝像素子:	1/2.8型 inch BSI CMOS image sensor		
總畫素:	1945(H) x 1097(V)		
Unit cell size:	2.9µm(H) × 2.9µm(V)		
攝像方式:	RGB primary color bayer arrangement mosaic filter on chip		
同步方式:	內同步		
掃描方式:	Progressive		
輸出形式:	1920x1080, 1280x720, 800x600, 704x480, 704x400, 640x480, 640x360, 320x240		
最大速率:	60 fps		
視頻壓縮:	H.264, MJPEG		
最低照度:	0.007lx F1.2 (AGC 高=72dB, 快門=關)		
水平解析度(S/N):	-		
功能設置:	瀏覽器		
AE 模式:	固定	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000,	1/25, 1/50, 1/100, 1/200, 1/400, 1/800,
		1/2000, 1/4000, 1/8000, 1/15000,	1/1600, 1/3200, 1/6400, 1/12800,
	EI	1/30000 (秒) *1	1/25600 (秒) *2
		1/30 - 1/30000 (秒) *1 x32 - 1/30000 (秒) *1 *3	1/25 - 1/25600 (秒) *2 x32 - 1/25600 (秒) *2 *3
白平衡:	ATM, PWB, MWB, PRESET (3000K, 5000K, 8000K)		
AGC:	ON	0 - 72dB	
	OFF	0dB	
MGC:	-		
白天/黑夜:	-		
Noise reduction 降噪:	30DNR OFF/ON (Level adjustable)		
寬動態範圍:	WDR OFF/ON (Level adjustable)		
鏡頭光圈:	DC		
逆光補償:	BLC, HSBLC		
白點校正功能:	ON		
清晰度:	Level可調整		
除霧:	OFF/ON (Level adjustable)		
數位變焦:	-		
隱私遮蔽:	16 masks		
鏡像倒像:	OFF, V-FLIP, H-FLIP, HV-FLIP		
Freeze:	-		
動態偵測:	OFF/ON 4個區域可任意配置		
Neg. Image:	-		
ONVIF:	profile S		
Supported protocols:	TCP/IP, UDP/IP, RTP(RTCP), RTSP		
	SNTP, HTTP, FTP, DHCP, DNS		
Interface:	RJ4S (10BASE-T, 100BASE-T), 4P Connector (MIC IN, POWER IN), 自動光圈 microSD (推薦:SDHC/SDXC 標準, MLC type, Speed CLASS 10 or more, Capacity of 256GB or less)		
電源電壓:	PoE +48V (IEEE02.3af), DC+12 - 36V *+12 is recommended for DC input		
消耗電流:	2.4/50mA (PoE +48V), 1.80W/150mA (DC+12V)		
動作溫度:	0 - +50°C		
保存溫度:	-30 - +70°C		
動作/保存溫度:	95% RH 以下 (無結露)		
鏡頭座:	CS mount (Back focus adjustable)		
重量:	約 80g		
配件:	4P cable, 六角板手, Clamp filter		

*1 : 頻率-60Hz, *2 : 頻率-50Hz, *3 : When using the Slow Shutter

*ONVIF is a trademark of Onvif, Inc

*microSD is a trademark of SD, Association, SD, SDHC and SDXC (and logos) are trademarks of SD-3C, LLC.

*Xprotect is a registered trademark of Milestone Systems A/S.

Accessories Options

CS-mount lenses

M13VG288IR M13VG850IR
AG3Z2812FCS-MPWIR AG4Z1214FCS-MPIR



Miniature lenses / Mount adaptors

M2520BC-12 M2920BC-12
M3620BC-12 M0620BC-12 28MMA-M12-155
M0816BC-12 M1625BC-12

C-mount lenses

*Not in our lineup
C-mount adaptor
30CMA-R

WAT-2400S



microSD
*Not in our lineup

Stands

MS50 WH-11
WH-21 WH-31

Water resistant camera housing / Mounting brackets

VCHO-15S
WH-6N PTP-300

4P cable (300mm)

POWER IN (DC+12-36V)

MIC. IN

Cable with connectors

CB-06

LINE IN

POWER IN (DC+12V)

CB-07

Power supply adaptor

SWI12-12-N-P5
SWI12-12-E-P5

MIC. IN

*Use the MIC, which is a plug-in power type.

CB-09

MIC. IN

*Use the MIC, which is CTIA / AHJ compatible.

LAN cable
(Shielded cable recommended)
*Not in our lineup

*Use the PoE hub or NVR supporting IEEE802.3af for the PoE power supply

Clamp filter

Network hub
*Not in our lineup

NVR
*Not in our lineup

PC
VMS / Browser / Others
*Not in our lineup

