

WAT-660E P3.7 1/4" Miniature Camera

Compact square camera with built-in lens




■ Min.illumination 0.01 lx F4.5 (AGC ON=42dB, Shutter=OFF)

■ Wide input voltage range (*DC 5V to 12V)

※Glass lenses and pinhole lens are not interchangeable

規格

視頻標準		EIA	CCIR
攝像素子		1/4 CMOS image sensor	
總畫素		648(H) x 488(V)	
Unitcell size		5.6μm × 5.6μm	
同步方式		內同步	
掃描方式		Progressive	
視頻輸出		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
解析度(H)		More than 480TVL (Center)	
最低照度 :		0.01lx. F4.5 (AGC HIGH=42dB, Shutter=OFF)	
信號雜訊比 :		More than 52dB (AGC OFF=0dB, γ=1.0)	
功能設置 :		-	
AE mode	Fixed	-	
	EI	1/60 – 1/100000 sec.	1/50 – 1/100000 sec.
AGC	ON	0 - 42 dB	
	OFF	-	
Gamma 特性		γ≒0.45	
Video leve:		100 IRE	
背光補償		BLC	
Interface		4P connector (Composite Video, Power in)	
電源電壓		DC+5V – 12V	
消耗電流		0.45W/90mA (DC+5V), 0.45W/37.5mA (DC+12V)	
動作溫度		-10° ~ 50°C	
保存溫度		-30° ~ 70°C	
動作/保存溫度		95% RH 以下 (無結霜)	
鏡頭座		3820BC-12 (f3.8 F2.0)	
重量		約 23g	
配件		4P cable	

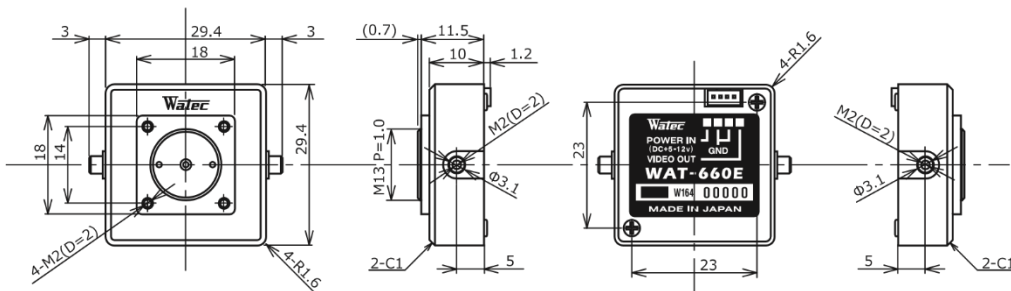

Accessories Options

